

# Metaphores

Studio G&R  
2023




Carpet composed of a composition of materials made with different techniques: short pile, long pile and "Rigo" fabric. The short pile carpet is always made in the color beige, the deep pile carpet is always made in the color white. The part in "Rigo" fabric is woven and finished by hand and can be made in three different colours: "Conchiglia" white, "Dalia" rose and "Nuvola" grey. The union of the different materials is achieved by heat-sealing.


Any slight color variation is due to the craftsmanship.  
Colors can be different, if dye bath change.

**Cm (L x P x H)**  
432.5 x 420  
490 x 412.5  
490 x 365


**Inches (L x P x H)**  
170½ x 165½  
193 x 162½  
193 x 143¾

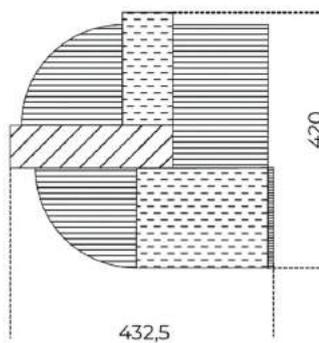


A

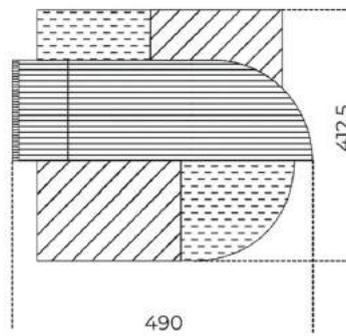


B

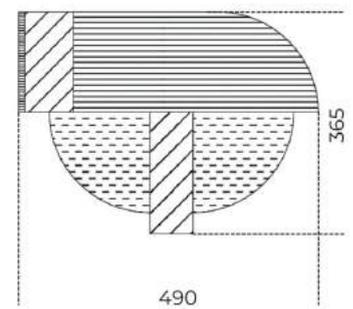


C



Short pile



Deep pile



"Rigo" fabric

# Finishes

## Rugs



Short pile - beige



Deep pile - white




"Conchiglia" white



"Nuvola" grey



"Dalia" rose

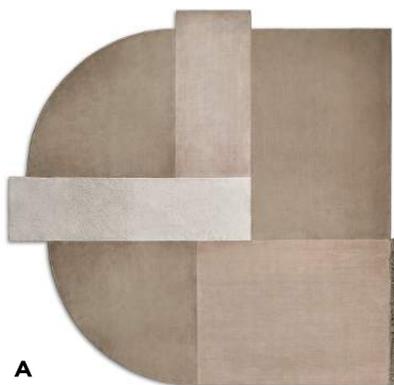

A



B



C



A  
Beige  
White  
"Dalia" rose



B  
Beige  
White  
"Conchiglia" white



C  
Beige  
White  
"Nuvola" grey

# Technical details

## Short pile carpet

Construction	Plain saxony 5/64"	 EN 14041 EN 1307
Composition	100% PA IMPREL® Opal	
Backing	Twinback	
Total height	± 12 mm	
Total weight	± 2.600 gr/m <sup>2</sup>	
Tuft density	± 330.000/m <sup>2</sup>	
Roll width	± 400 cm	
Flammability	Cfl-s1	

## Deep pile carpet

Construction	Berber Shaggy 1/8"	 EN 13041 EN 1307
Composition	100% PA IMPREL® Opal	
Backing	Twinback	
Pile height	± 9,5 mm	
Total height	± 13 mm	
Pile weight	± 2.500 gr/m <sup>2</sup>	
Total weight	± 3.200 gr/m <sup>2</sup>	
Tuft density	± 98.000/m <sup>2</sup>	
Roll width	± 400 cm	
Flammability	Cfl-s1	

## "Rigo" fabric carpet

Composition	100% Polyamide 6.0	 EN 14041
Primary backing	Action Backing	
Secondary backing	Cotton Cloth	
Roll width	± 400 cm	
Pile weight	± 2.500 gr/m <sup>2</sup>	
Total weight	± 3.500 gr/m <sup>2</sup>	
Pile height	± 8 mm	
Total height	± 11 mm	
Fire Classification	Cfl-S1	
Use area	Class 32	
Light fastness	≥ 5	
Wearability	≥ 5	
Water fastness	≥ 5	
TOG rating	1,14	